

MARCH 2016



DURAGROOVE™
FACADE SYSTEM



Fibre Cement

AUSTRALIAN OWNED & MANUFACTURED
WWW.BGCINNOVADESIGN.COM.AU

INTRODUCING INNOVA™

BGC'S STUNNING RANGE OF FACADE, LINING AND FLOORING PRODUCTS, INNOVA™ WILL MOVE YOU TO REASSESS YOUR CONCEPT OF EXCELLENCE IN FACADES AND FLOORING SYSTEMS. DURABLE AND DYNAMIC, FRESH AND CONTEMPORARY, INNOVA™ IS ALREADY TURNING INDUSTRY HEADS. NOW LET THE INNOVA™ RANGE OF CLADDING AND FLOORING PRODUCTS BREATHE NEW LIFE INTO YOUR CREATIVITY AND PROJECT SPECIFICATION.



FOR UP-TO-THE-MINUTE EXTERIORS OR INTERIORS, CHOOSE BGC DURAGROOVE™ CLADDING. A PEERLESSLY ADAPTABLE, VERTICALLY-GROOVED PANEL AVAILABLE IN DIFFERENT PROFILES AND SPACING, DURAGROOVE™ HAS A SHIPLAP JOIN TO EASE AND SPEED YOUR INSTALLATION.

SPECIFY DURAGROOVE™ FOR SINGLE-STOREY AND MEDIUM-HEIGHT PROJECTS. DURAGROOVE™ COMES IN FOUR VARIANTS: SMOOTH WIDE (150MM); SMOOTH EXTRA WIDE (400MM); SMOOTH NARROW (100MM); AND WOODGRAIN WIDE (150MM).

DURAGROOVE™ FACADE SYSTEM

- / VERTICAL GROOVES – EXCITINGLY CONTEMPORARY ALTERNATIVE TO TRADITIONAL WEATHERBOARD
- / LIGHTWEIGHT AND DURABLE
- / ACRYLIC SEALED PANELS AID PAINT APPLICATION
- / QUICK TO INSTALL – NO NEED FOR TAPED AND FILLED JOINTS
- / PANELS RESISTANT TO TERMITES, AIR, STEAM, SALT AND SUNLIGHT



CONTENTS

| | |
|----------------------------------|--------|
| APPLICATIONS | / 5 |
| ADVANTAGES | / 5 |
| ENERGY EFFICIENCY CONSIDERATIONS | / 5 |
| PRODUCT INFORMATION | / 5 |
| FIRE RESISTANCE | / 5 |
| DURABILITY | / 5 |
| THERMAL CONDUCTIVITY | / 5 |
| PANEL SIZES AND MASS | / 5 |
| SHEET TOLERANCES | / 5 |
| HEALTH AND SAFETY | / 6 |
| CUTTING AND DRILLING | / 6 |
| HANDLING AND STORAGE | / 6 |
| COASTAL AREAS | / 6 |
| ACCESSORIES AVAILABLE FROM BGC | / 7 |
| FASTENERS | / 7 |
| CONSTRUCTION DETAILS | / 8 |
| INSTALLATION DETAILS | / 9-19 |
| THERMAL BREAKS | / 20 |
| BUSHFIRE/BOUNDARY WALL | / 21 |
| PAINTING | / 22 |
| MAINTENANCE | / 22 |
| WARRANTY | / 22 |

APPLICATIONS

Duragroove™ is a strong and durable cladding which has distinctive vertical grooves and is suitable for finishing with a textured paint, creating a rendered look.

Duragroove™ is suitable for low to medium rise buildings and can be used on both timber and steel framed buildings. It is also ideal for renovations and alterations to existing dwellings. In smaller areas it provides a distinctive looking feature wall and can be used in either interior or exterior applications.

ADVANTAGES

- / A choice of groove widths and finishes available
- / Has a shiplap join to ease installation
- / Is lightweight and durable
- / Quick to install as it eliminates the need for taped and filled joints
- / Panels are not affected by termites, air, steam, salt or sunlight

ENERGY EFFICIENCY CONSIDERATIONS

Energy efficiency requirements have been introduced into the Building Code of Australia (BCA) for both commercial and residential buildings. Thermal heat transfer into and out of the building envelope will effect the running cost of the building and careful consideration of thermal heat transfer needs to be addressed by the architects, engineers and building designers. Thermal bridging through steel framing will diminish the total R-Value; thermal conductance, of the wall. Thermal breaks are required for steel framed buildings and should be installed between the steel framing and the Duragroove™ panels. Thermal breaks should have a minimum R-Value of 0.2.

PRODUCT INFORMATION

Duragroove™ panels are manufactured from Portland cement, finely ground silica, cellulose fibres and water. Panels are cured in a high-pressure steam autoclave to create a durable, dimensionally stable product.

Duragroove™ panels are manufactured to the Australian / New Zealand Standard AS/NZS 2908.2-2000 Cellulose-Cement Products, Part 2: Flat sheets and Duragroove™ is classified as Type A-Category 2.

FIRE RESISTANCE

BGC Fibre Cement products have been tested in accordance to Australian Standard AS1530.3.

These tests deemed the following Early Fire Hazard Indices:

- / Ignition Index 0
- / Spread of Flame Index 0
- / Heat Evolved Index 0
- / Smoke Developed Index 0-1

DURABILITY

Duragroove™ physical properties make it a very durable product.

- / Duragroove™ panels will not rot or burn and are unaffected by termites, air, steam, salt and sunlight.
- / Duragroove™ panels are not adversely affected over a temperature range of 0°C to 95°C.

Vapour permeable sarking must be installed in accordance with the AS/NZS 4200.2 – 'Pliable building membranes and underlays – Installation' and the sarking manufacturers' guidelines. The sarking should have the following properties:

- / Vapour barrier – low or medium
- / Water barrier – high

Vapour permeable sarking is used to prevent moisture ingress by acting as a drainage plane whilst enabling water vapour build up from inside the frame to escape.

THERMAL CONDUCTIVITY

Duragroove™ panels have relatively low thermal conductivity. At Equilibrium Moisture content the approximate thermal conductivity of Duragroove™ is; - 0.036 W/m°C.

WEATHER RESISTANCE / FREEZE THAW

Duragroove™ conforms to the Building Code of Australia (BCA) requirements for external wall applications. Duragroove™ facade system has been tested to AS/NZS 4284 Testing of Building Facades.

Duragroove™ subject to freeze/thaw conditions must be painted. Duragroove™ should not be used in situations where it will be in direct contact with snow or ice for prolonged periods.

SHEET SIZES AND WEIGHT-TABLE 1

| THICKNESS mm | FINISH | WEIGHT KG/M ² | WIDTH mm | LENGTH mm | | |
|--------------|-------------------|--------------------------|----------|-----------|------|------|
| | | | | 2450 | 2750 | 3000 |
| 9 | Smooth Narrow | 13.5 | 1200 | ✓ | ✓ | ✓ |
| | Smooth Wide | | | ✓ | ✓ | ✓ |
| | Smooth Extra Wide | | | ✓ | ✓ | ✓ |
| | Woodgrain | | | ✓ | ✓ | ✓ |

Weights are based on Equilibrium Moisture Content

- Duragroove™ Smooth Narrow**
100mm between grooves. 4.5mm width of groove
- Duragroove™ Smooth Wide**
150mm between grooves. 4.5mm width of groove
- Duragroove™ Smooth Extra Wide**
400mm between grooves. 10mm width of groove
- Duragroove™ Woodgrain**
150mm between grooves. 4.5mm width of groove

SHEET TOLERANCES

Duragroove™ complies with the requirements of AS 2908.2.

HEALTH AND SAFETY

Duragroove™ is manufactured from cellulose fibre, finely ground sand, Portland cement and additives. As manufactured, the product will not release airborne dust, but during drilling, cutting and sanding operations cellulose fibres, silica and calcium silicate dust may be released.

Breathing in fine silica dust is hazardous and prolonged exposure (usually over several years) may cause bronchitis, silicosis or cancer.

AVOID DUST INHALATION

When cutting sheets, work in a well ventilated area and use the methods recommended in this literature to minimise dust generation. If using power tools wear an approved (P1 or P2) dust mask and safety glasses.

These precautions are not necessary when stacking, unloading or handling fibre cement products.

For further information or a Material Safety Data Sheet contact the nearest BGC Sales Office or go to www.bgcinnovadesign.com.au

CUTTING AND DRILLING

Duragroove™ may be cut to size on site. If using power tools for cutting, drilling or sanding they must be fitted with appropriate dust collection devices or alternatively an approved (P1 or P2) dust mask and safety glasses shall be worn. It is recommended that work always be carried out in a well ventilated location.

The most suitable cutting methods are:

/ DURABLADE
180mm Diameter.
This unique cutting blade is ideal for cutting Fibre Cement. Can be fitted to a 185mm circular saw, ie Makita or similar. Please ensure safe working practices when using.



/ NOTCHING
Notches can be made by cutting the two sides of the notch. Score along the back edge then snap upwards to remove the notch.

/ DRILLING
Use normal high-speed masonry drill bits. Do not use the drill's hammer function. For small round holes, the use of a hole-saw is recommended.

For small rectangular or circular penetrations, drill a series of small holes around the perimeter of the cut out. Tap out the waste piece from the sheet face while supporting the underside of the opening to avoid damage. Clean rough edges with a rasp.

Large rectangular openings are formed by deeply scoring the perimeter of the opening. Next, form a hole in the centre of the opening (refer method above) then saw cut from the hole to the corners of the opening. Snap out the four triangular segments. Clean rough edges with a rasp. (see method above).

HANDLING AND STORAGE

Duragroove™ must be stacked flat, up off the ground and supported on equally spaced (max 400mm) level gluts. Care should be taken to avoid damage to the ends, edges and surfaces.

Sheets must be kept dry. When stored outdoors it must be protected from the weather. Sheets must be dry prior to fixing, jointing or finishing.




EXTRA CARE MUST BE TAKEN AT THE SHEET EDGES TO PREVENT CRACKING OF THE SHIPLAP JOIN.

COASTAL AREAS

The durability of galvanised nails and screws used for exterior cladding in coastal or similar corrosive environments can be as low as 10 years.

For this reason BGC recommend the use of Stainless Steel fasteners within 1km of the coast or other large expanses of salt water.

ACCESSORIES AVAILABLE FROM BGC

| | | | |
|---|--------|------------------------------|---|
| EPDM FOAM GASKET (Used to prevent moisture ingress at sheet joins and as a Thermal Break). | 25m | BGC PRODUCT CODE 845 |  |
| ALUMINIUM INTERNAL CORNER | 3000mm | BGC PRODUCT CODE INTCNR12 |  |
| ALUMINIUM EXTERNAL CORNER | 3000mm | BGC PRODUCT CODE EXTCNR12 |  |
| ALUMINIUM HORIZONTAL FLASHING | 3000mm | BGC PRODUCT CODE HORIZ9 |  |

FASTENERS - SUPPLIED BY OTHERS

DURAGROOVE™ TO TIMBER FRAME

2.8 x 30mm Fibre Cement Nail
(minimum Class 3 corrosion resistant)



2.8 x 40mm Gun Nail
(minimum Class 3 corrosion resistant)



/ Screws should be countersunk 2mm and filled with BGC Exterior Finishing Compound or Epoxy sealer such as Megapoxy P1, Hilti CA125 or Hilti CA273 and sanded flush to provide a flat surface for finish coating.

/ Nails must be driven flush to the panel surface.

DURAGROOVE™ TO STEEL FRAME

To Steel – 0.75BMT
No 8 x 30mm Countersunk Self Drilling
(minimum Class 3 corrosion resistant)



To Steel - 0.8-1.6BMT
8 x 40mm Wingtek Self Embedding Head Screw
(minimum Class 3 corrosion resistant)



PRE COUNTERSINK

When using screws to fasten Duragroove™, pre countersinking is suggested so that the fastener is 2mm under the sheet surface for filling with epoxy filler and BGC Exterior Finishing Compounds.

Precountersink 2mm below surface using BGC Countersinking Tool





NARROW



WIDE



EXTRA WIDE



WOODGRAIN

CONSTRUCTION DETAILS

FRAMING

Duragroove™ panels must be installed vertically to both timber and lightweight steel frames.

Ensure that the frame is square and work from a central datum line. The frame must be straight and true to provide a flush face to receive the panels.

BGC recommend a maximum tolerance of 3mm-4mm in any 3000mm length of frame.

Duragroove™ will not straighten excessively warped or distorted frames and any warping may still be visible after Duragroove™ is applied. Warped framing will require remedial action.

FIGURE 1
FRAME STRAIGHTNESS



TIMBER FRAMES

Use of a timber frame must be in accordance with AS1684 – Residential timber-framed construction and the framing manufacturers' specifications.

Use only seasoned timber. Do not use unseasoned timber as it is prone to shrinkage and can cause excessive movement.

"Timber used for house construction must have the level of durability appropriate for the relevant climate and expected service life conditions including exposure to insect attacks or to moisture which could cause decay" – Reference AS1684.2

THE FRAMING WIDTH AT SHEET JOINTS MUST BE A MINIMUM OF 45MM. THE INTERMEDIATE SUPPORT STUDS SHOULD BE A MINIMUM OF 70 X 35MM.

LIGHTWEIGHT STEEL FRAMES

Use of steel frame must be in accordance with AS3623 – Domestic metal framing and the framing manufacturers' specifications.

Framing members must have a Base Metal Thickness (BMT) between 0.50 to 1.6mm. The steel framing must have the appropriate level of durability required to prevent corrosion.


The framing width at sheet joints must be a minimum of 50mm. The intermediate support studs should be a minimum of 64 x 35mm.

MAXIMUM STUD & FASTENER SPACING TABLE 2

| Wind Classification AS4055 | GENERAL AREAS OF WALLS (MM) | | WITHIN 1200MM OF BUILDING EDGES (MM) | |
|----------------------------|-----------------------------|------------------|--------------------------------------|------------------|
| | Stud Spacing (mm) | Fastener Spacing | Stud Spacing | Fastener Spacing |
| N1, N2, N3, N4 | 600 | 200 | 600 | 200 |
| N5 | 450 | 200 | 300 | 150 |
| N6 | 450 | 150 | 300 | 125 |
| C1, C2 | 600 | 200 | 600 | 200 |
| C3 | 450 | 200 | 300 | 150 |
| C4 | 450 | 150 | 300 | 125 |

INSTALLATION DETAILS

FIGURE 2
FASTENER POSITIONING

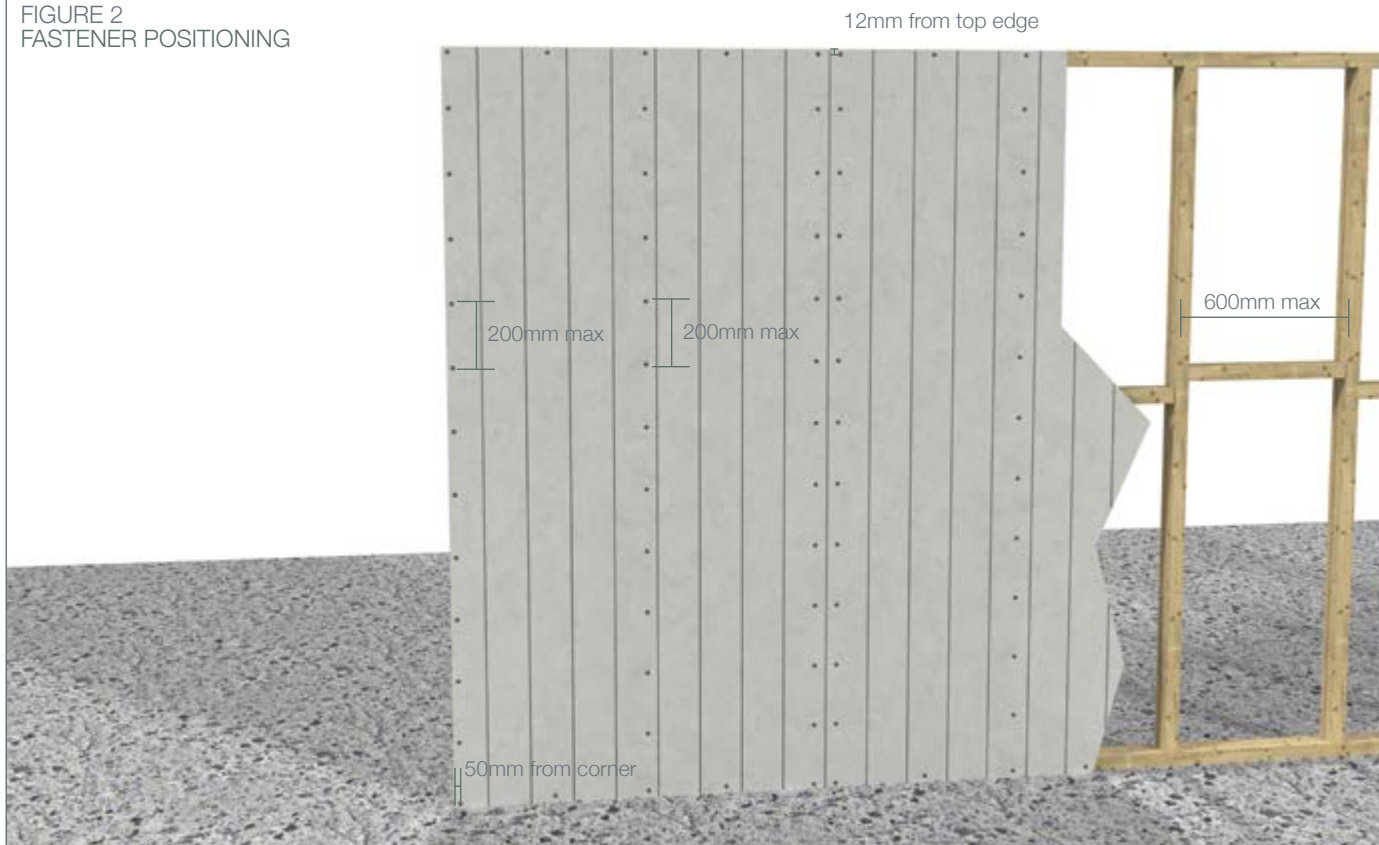

Duragroove™ panels should be installed vertically with all sheet edges fully supported. The centre joints must coincide with the


centre lines of the framing member and all sheets should be installed in one direction.

FIGURE 3
APPLY EPDM FOAM GASKET



At every vertical joint, fix a continuous strip of EPDM Foam Gasket to the vapour permeable sarking along the stud. This assists to prevent moisture ingress at the sheet joints.

FIGURE 4
SHEET EDGE POSITION

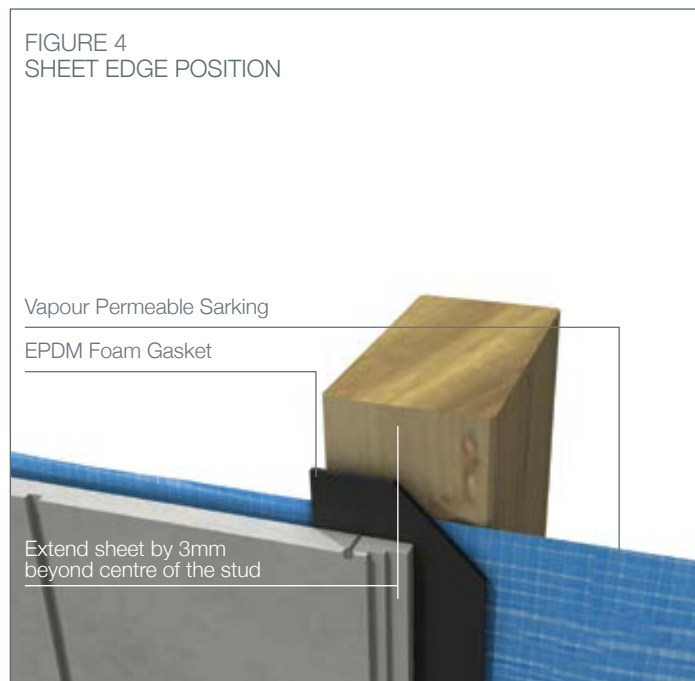

Position the underlap sheet on every stud 3mm beyond the centre of the stud to ensure the fasteners fixed at the edge of the sheet have adequate distance into the stud.

INSTALLATION DETAILS

As detailed on p7, there are several different fasteners that can be used to fix Duragroove™ panels.

FIGURE 5
FIBRE CEMENT NAIL FIXING – TIMBER FRAME

Vapour
Permeable
Sarking

EPDM Foam Gasket

Fibre Cement Nails

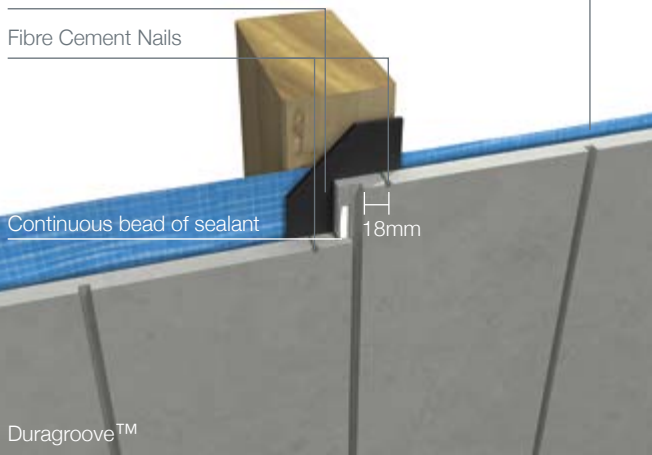


FIGURE 7
COUNTERSUNK SCREW – LIGHTWEIGHT STEEL FRAME

Vapour
Permeable
Sarking

EPDM Foam Gasket

Screws-countersunk
2mm Finish with Epoxy


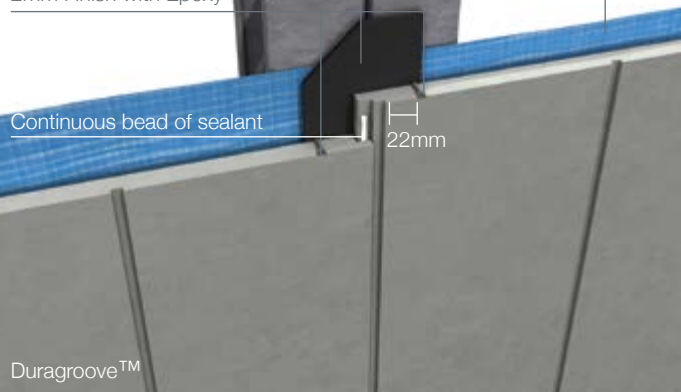


FIGURE 6
FLUSH SCREW – LIGHTWEIGHT STEEL FRAME

Vapour
Permeable
Sarking

EPDM Foam Gasket

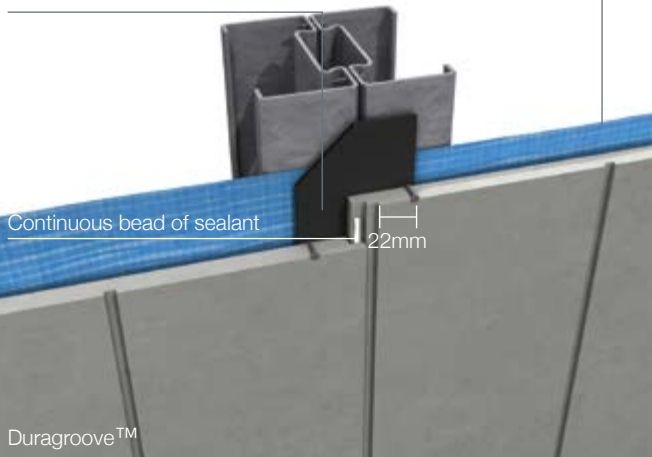

INSTALLATION DETAILS

To fix the first sheet, set in place ensuring the required edge distances are maintained.

FIGURE 8
FIX FIRST SHEET

Vapour Permeable Sarking

EPDM Foam Gasket



Apply a continuous 4mm bead of sealant to the edge of the shiplap join.

FIGURE 9
APPLY SEALANT

Vapour Permeable Sarking

EPDM Foam Gasket



FIGURE 10
FIX NEXT SHEET

Vapour Permeable Sarking

EPDM Foam Gasket



INSTALLATION DETAILS

The architectural intent and details of buildings vary from one designer to the next and the variety of facade details would be impossible to catalogue.

The following detailed diagrams are intended to assist the designer in achieving a high quality weather resistant Duragroove™ installation.

The designer should not digress from the specification set out in this manual.


FIGURE 11
SLAB EDGE

Vapour Permeable Sarking*

Duragroove™

Damp Course*

150mm clearance from earth,
50mm clearance from finished
surface e.g. paving/concrete.

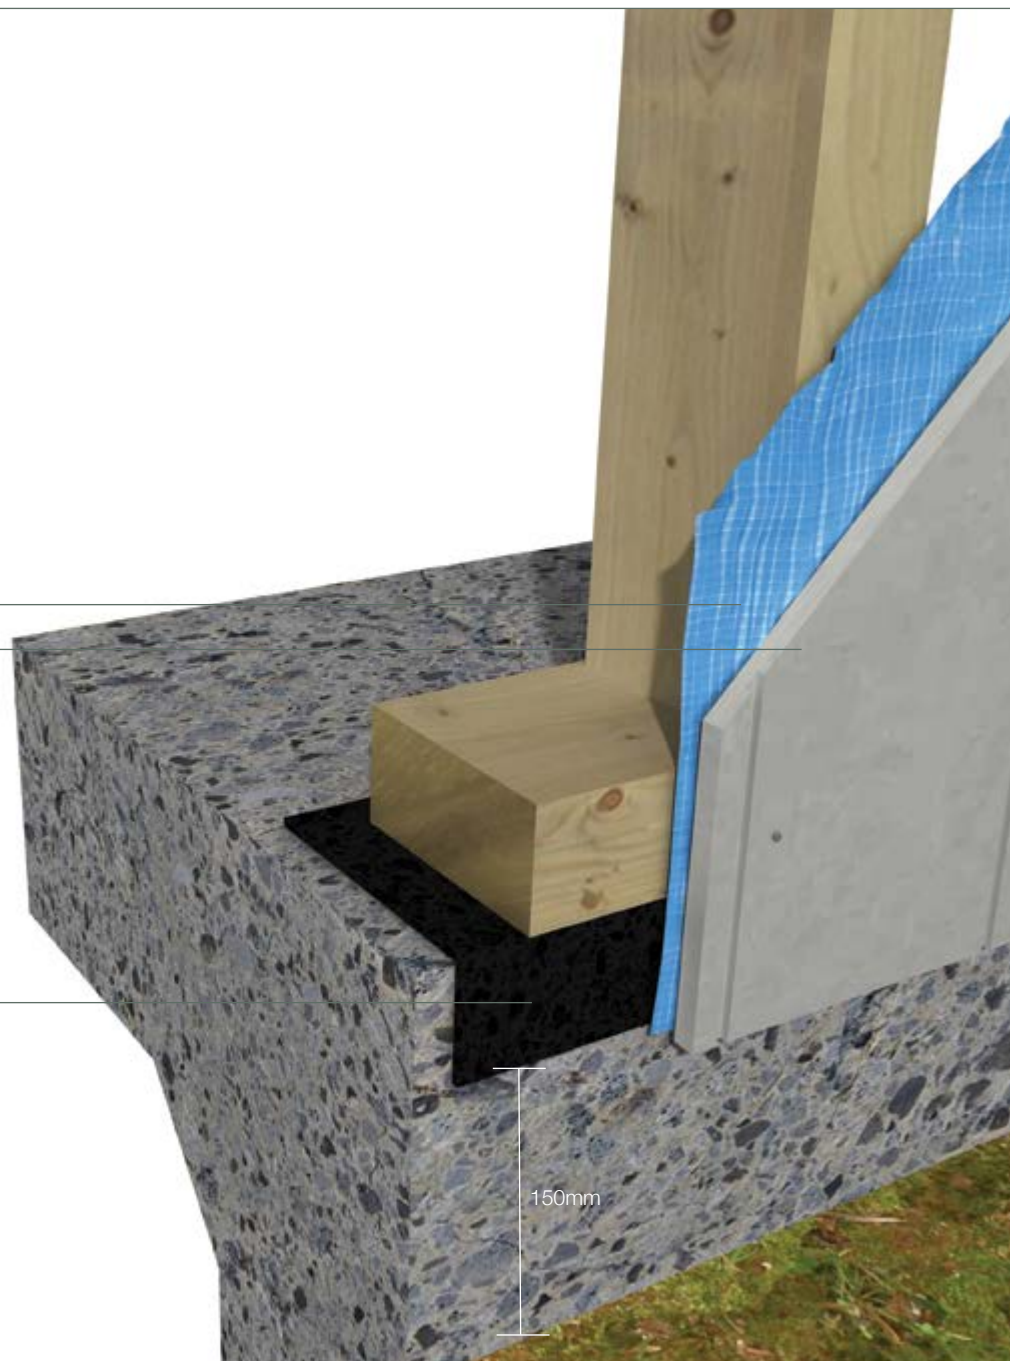

*Components not supplied by BGC

INSTALLATION DETAILS

FIGURE 12
EXTERNAL CORNER – SEALANT OPTION


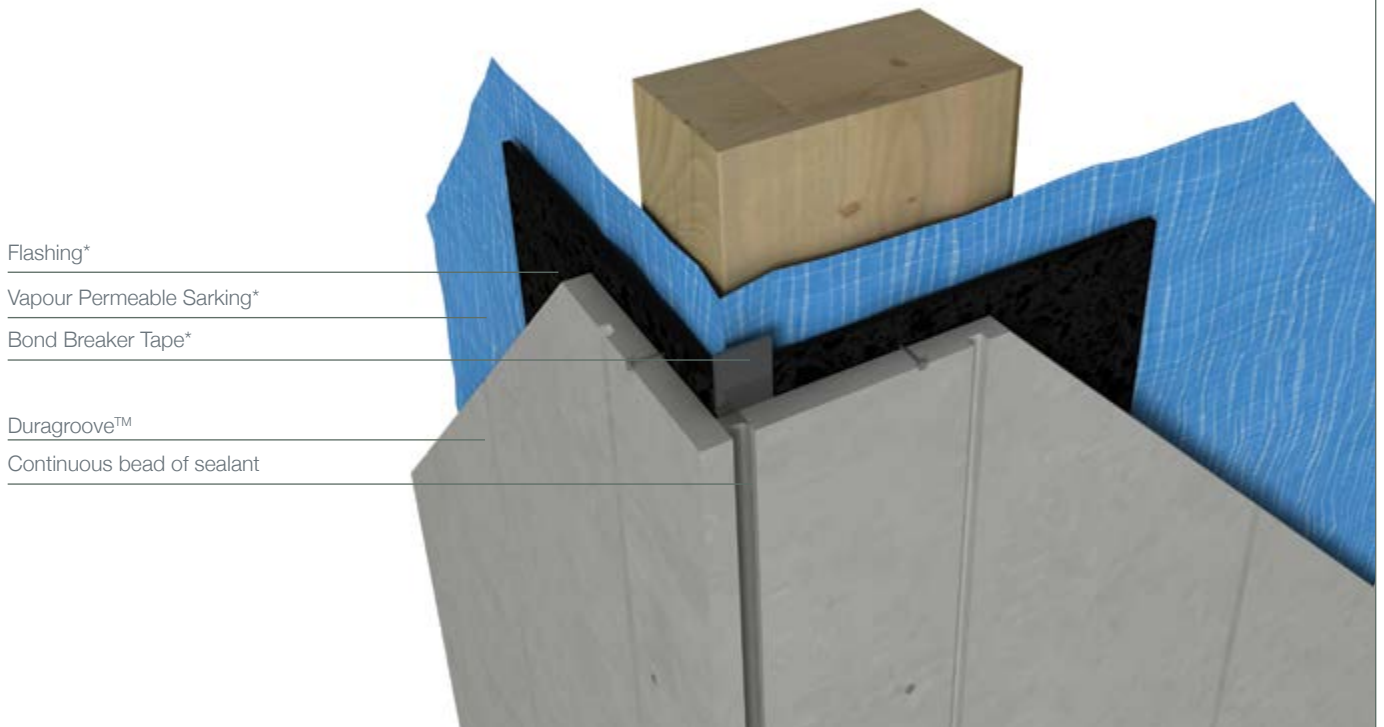


FIGURE 13
EXTERNAL CORNER – ALUMINIUM

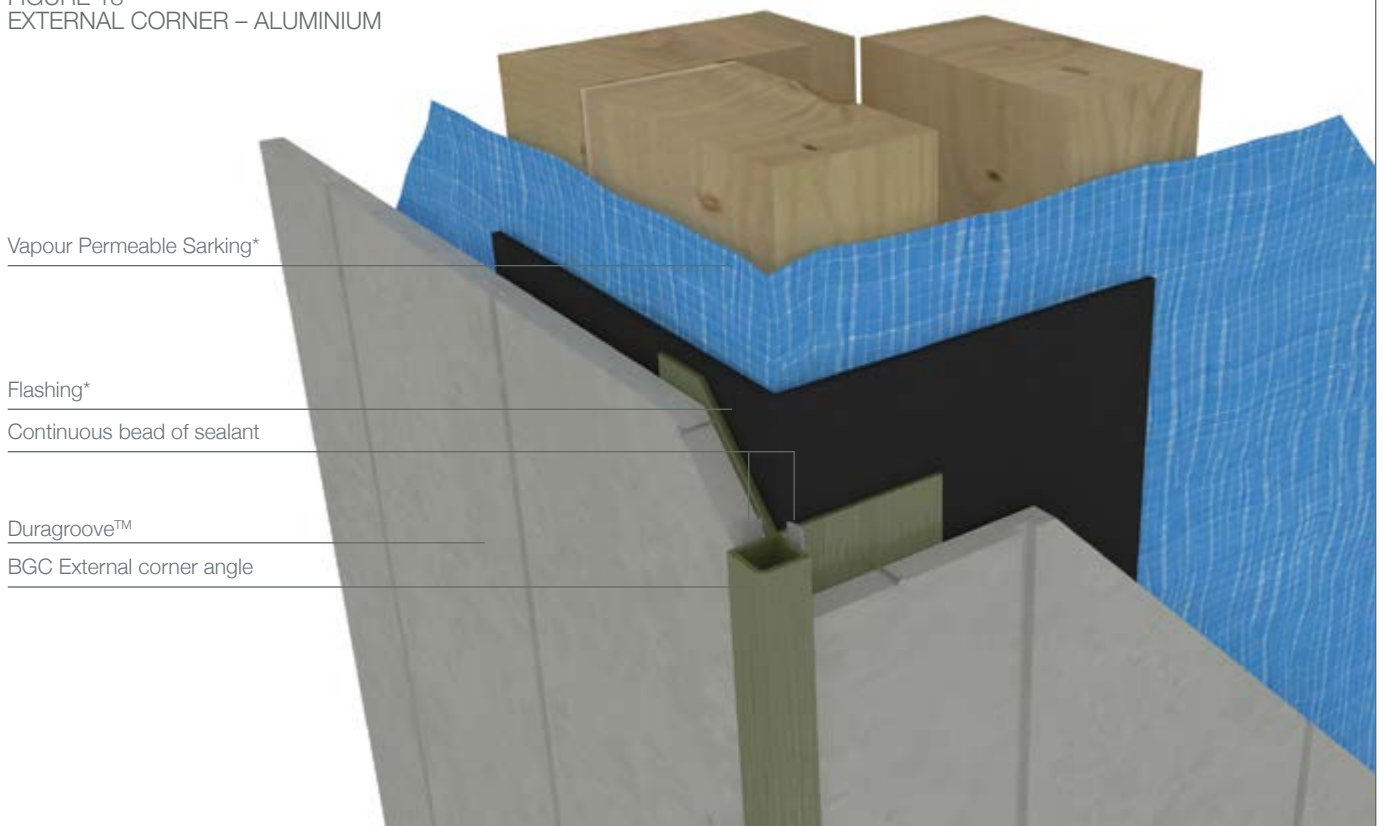

*Components not supplied by BGC

INSTALLATION DETAILS

FIGURE 14
INTERNAL CORNER – SEALANT OPTION


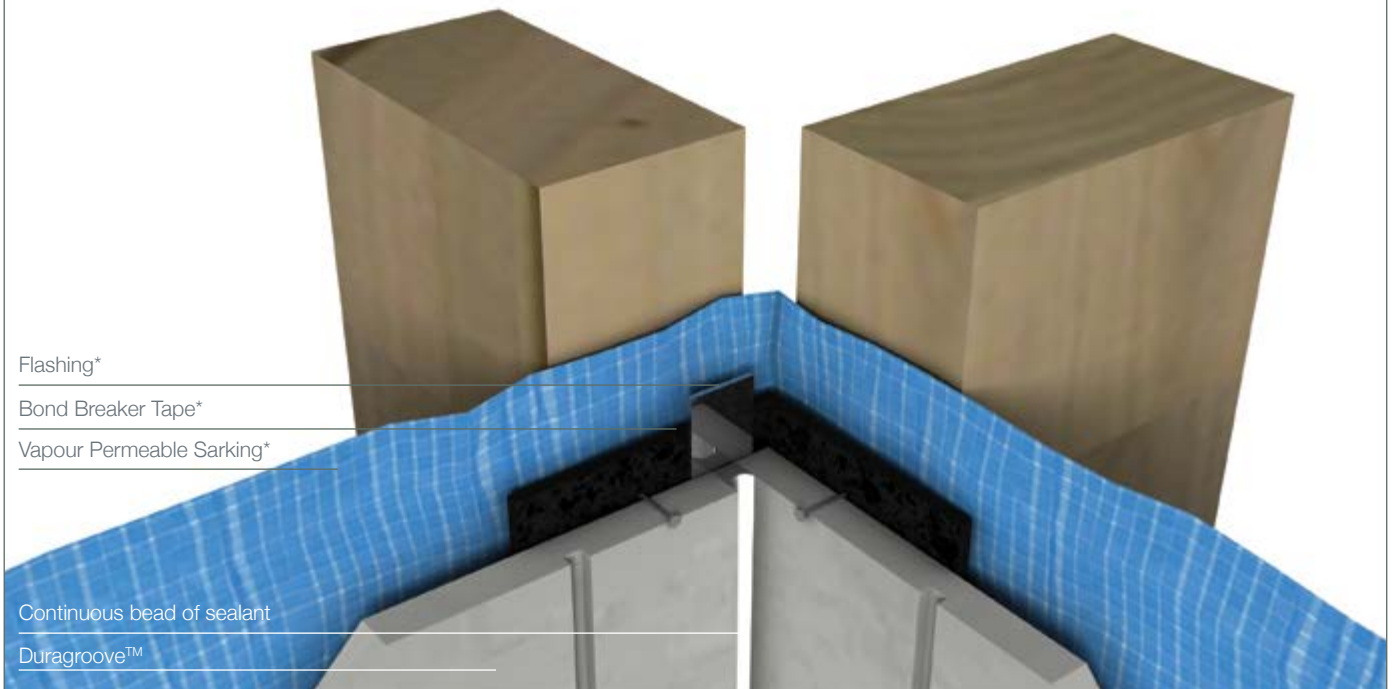


FIGURE 15
INTERNAL CORNER – ALUMINIUM

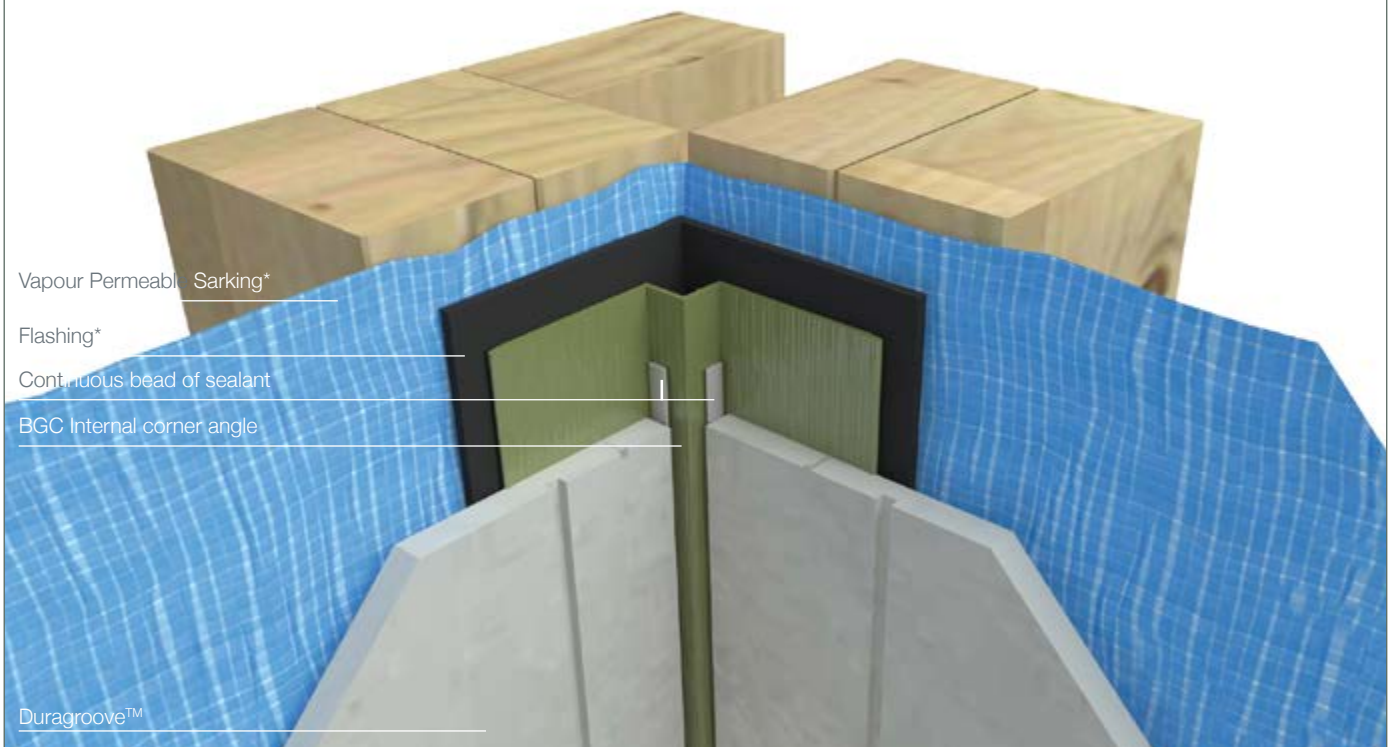

*Components not supplied by BGC

INSTALLATION DETAILS

FIGURE 16
WINDOW HEAD

Duragroove™

Continuous bead of sealant

Vapour Permeable Sarking*

Optional trim*

Flashing*




FIGURE 17
WINDOW SILL

Continuous bead of sealant

Flashing*

Vapour Permeable Sarking*

Duragroove™

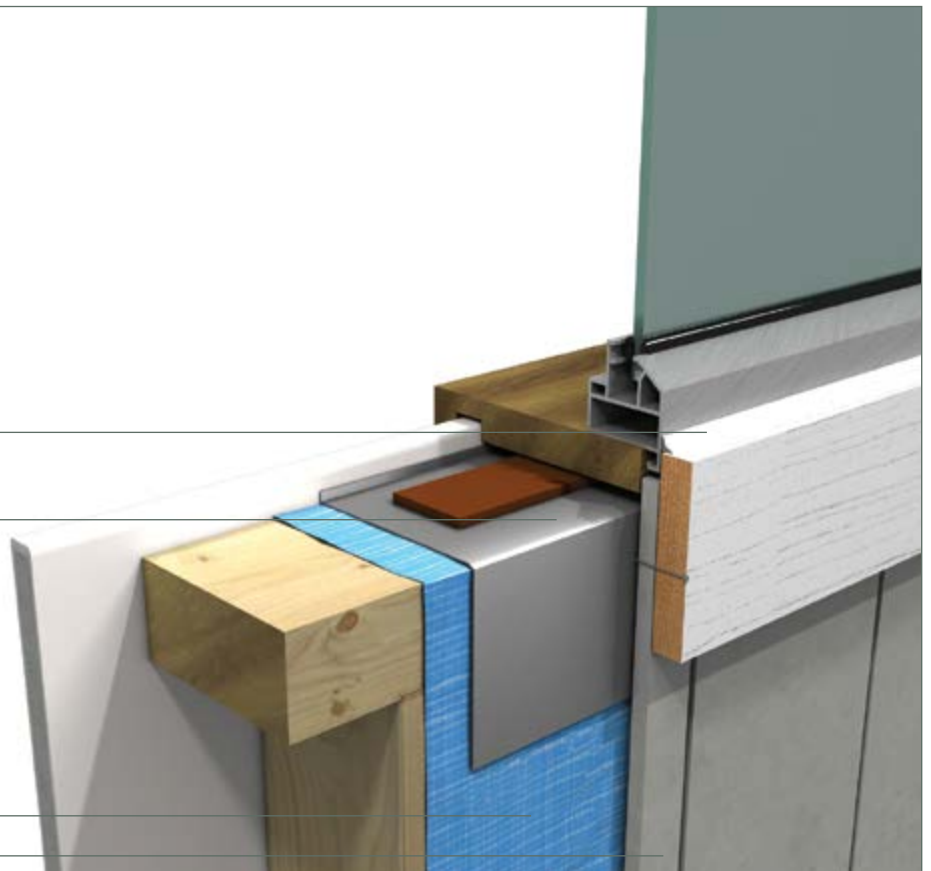

*Components not supplied by BGC

INSTALLATION DETAILS

FIGURE 18
WINDOW JAMB


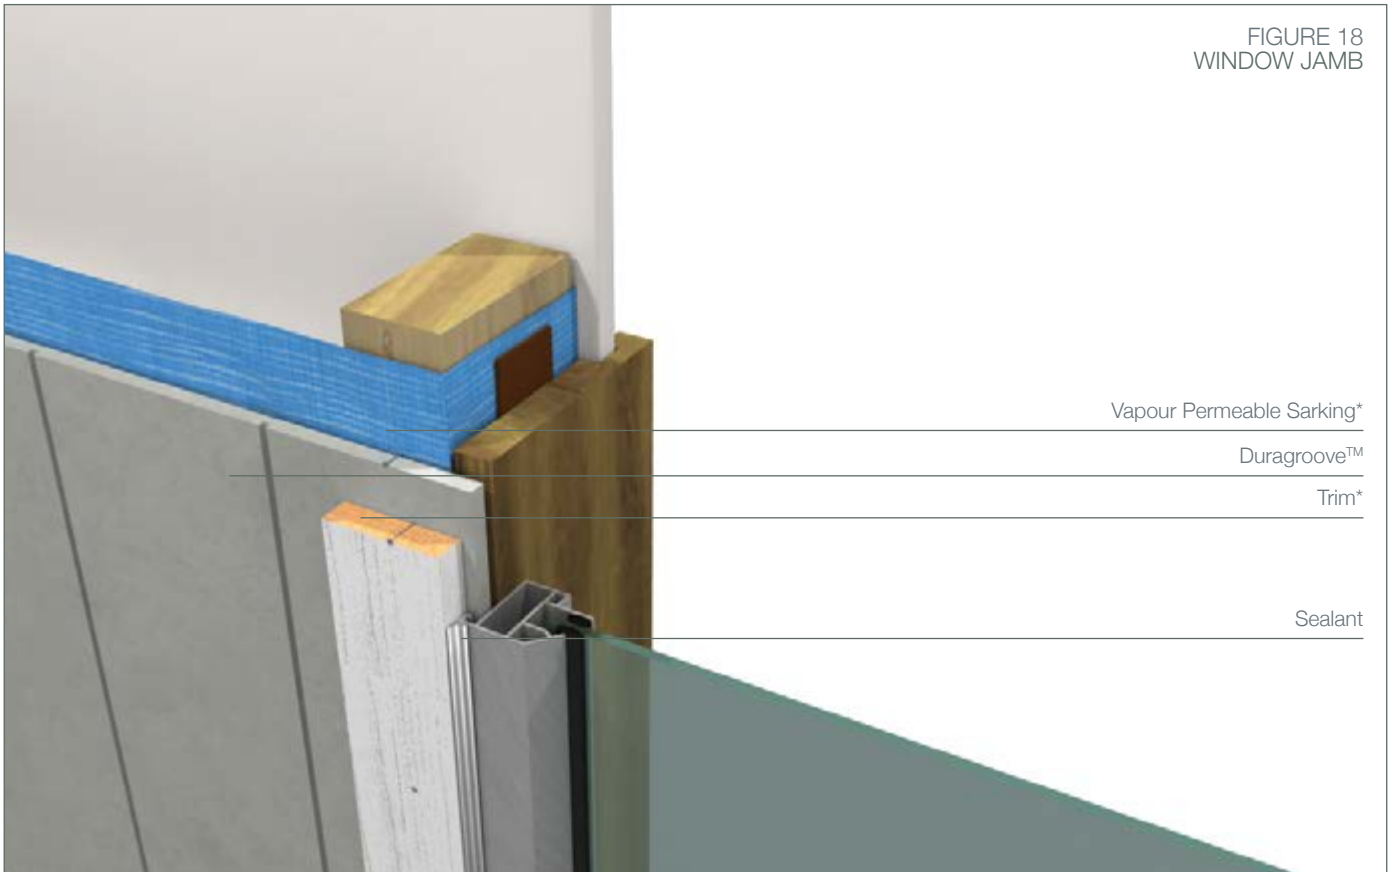


FIGURE 19
VERTICAL BUTT JOINT

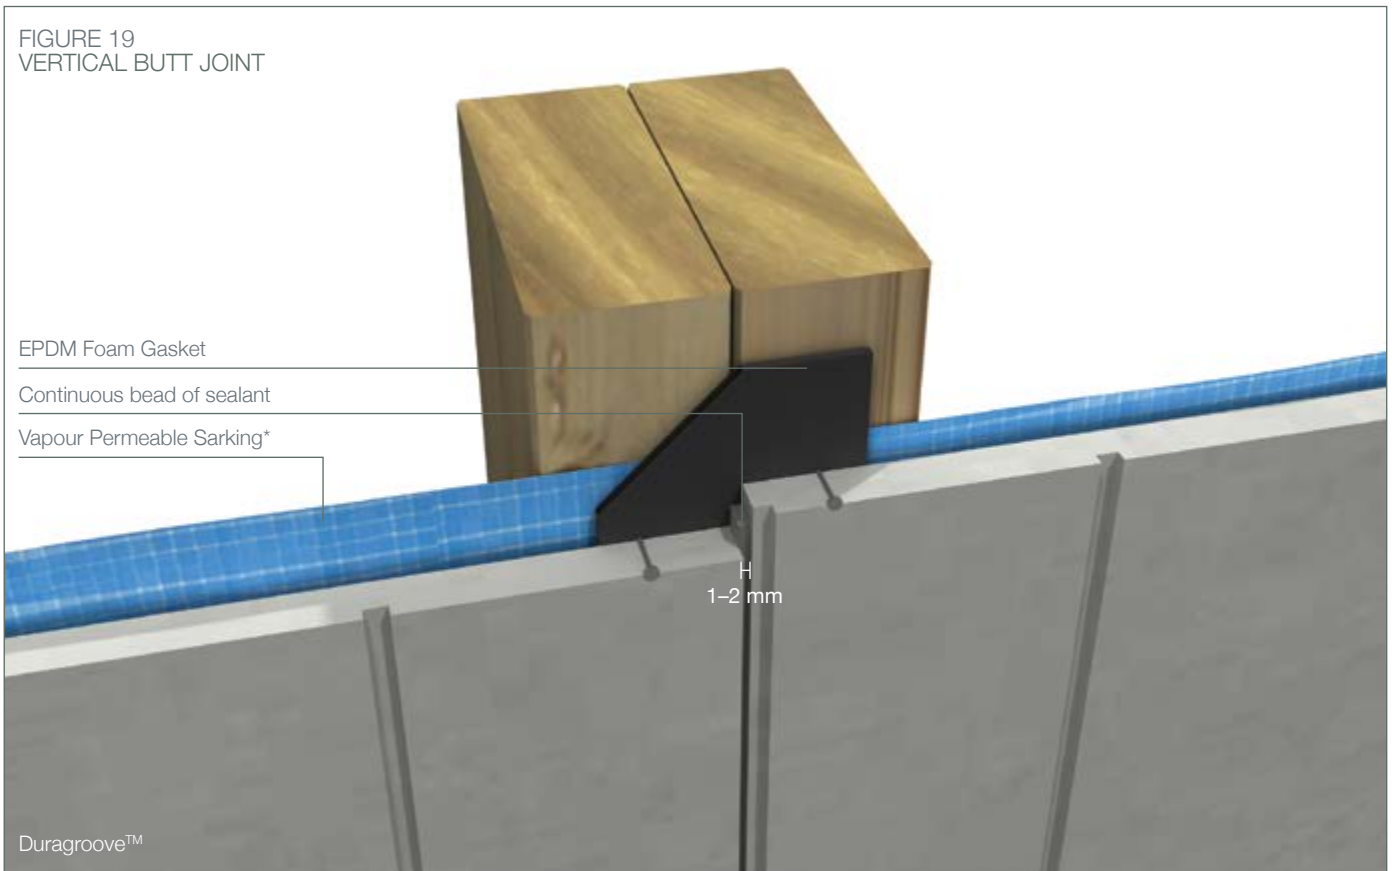

*Components not supplied by BGC

INSTALLATION DETAILS

FIGURE 20
LOWER FLOOR JUNCTION

Flooring*

Vapour Permeable Sarking*

Duragroove™

Damp Course*



FIGURE 21
UPPER FLOOR JUNCTION


Duragroove™

Flooring*

BGC Horizontal Flashing

Vapour Permeable Sarking*

Duragroove™

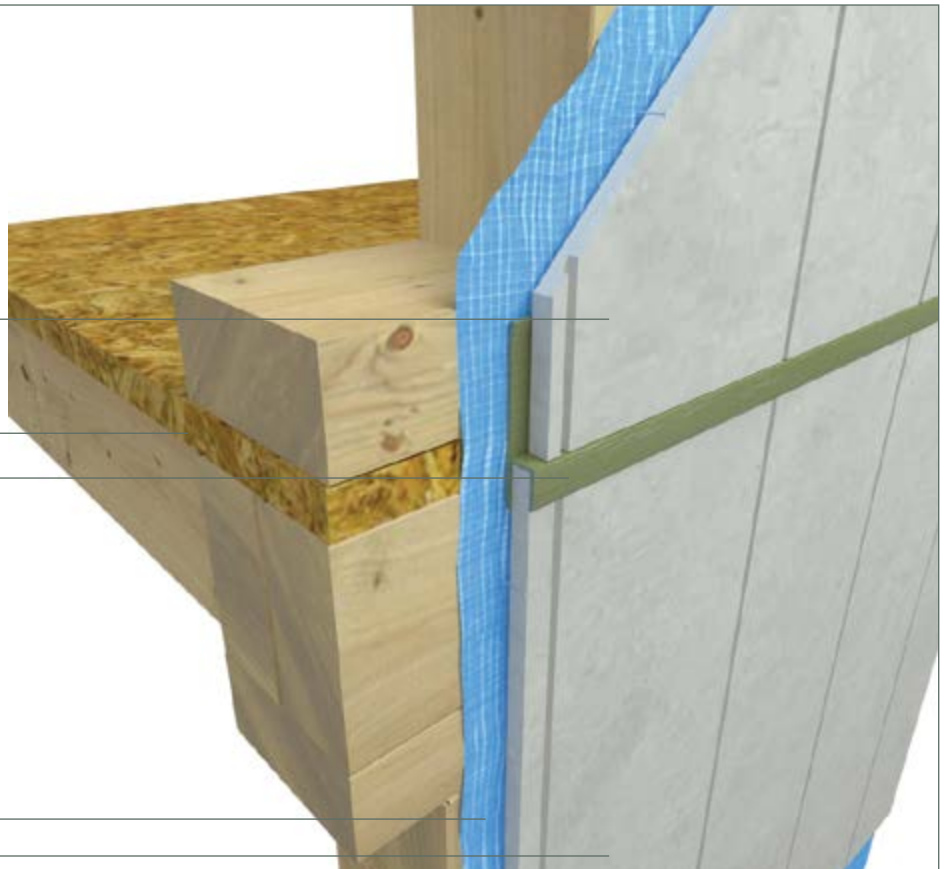

*Components not supplied by BGC

INSTALLATION DETAILS

FIGURE 22
UPPER FLOOR JUNCTION – OPTION 2

Continuous bead of sealant

Vapour Permeable Sarking*

Duragroove™

Architectural profile or similar*

Duragroove™

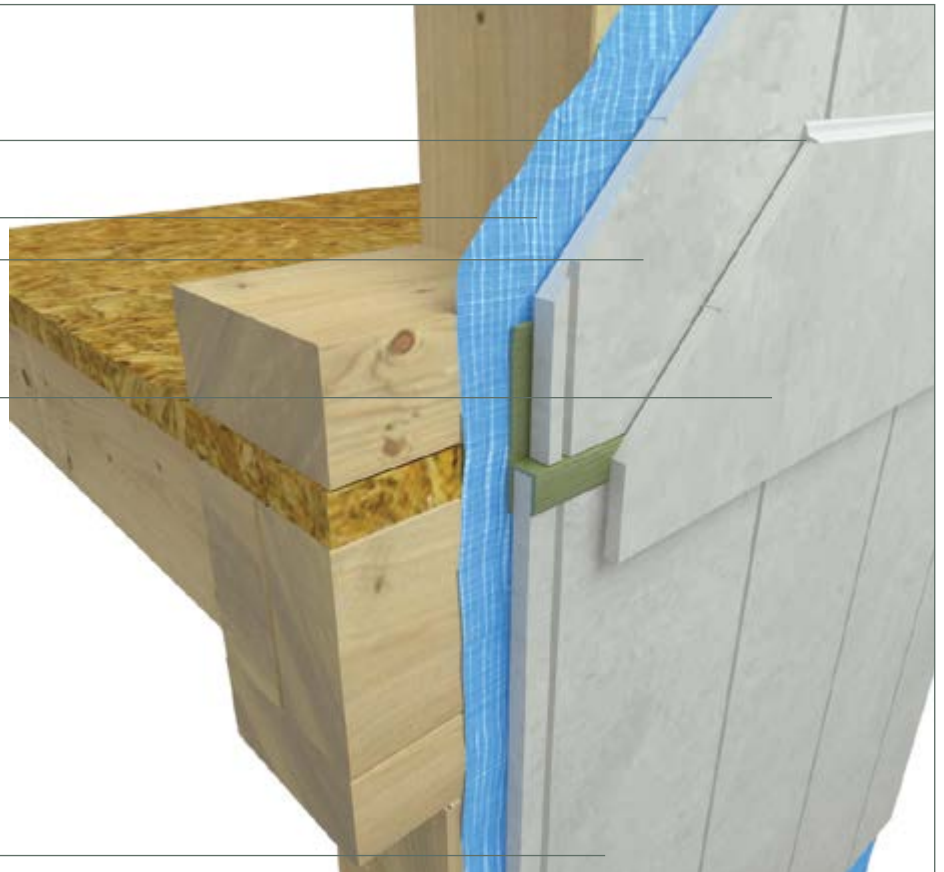


FIGURE 23
HORIZONTAL JUNCTION 1


Duragroove™

Vapour Permeable Sarking*

Suitable flashing*

Damp course*

Masonry wall*

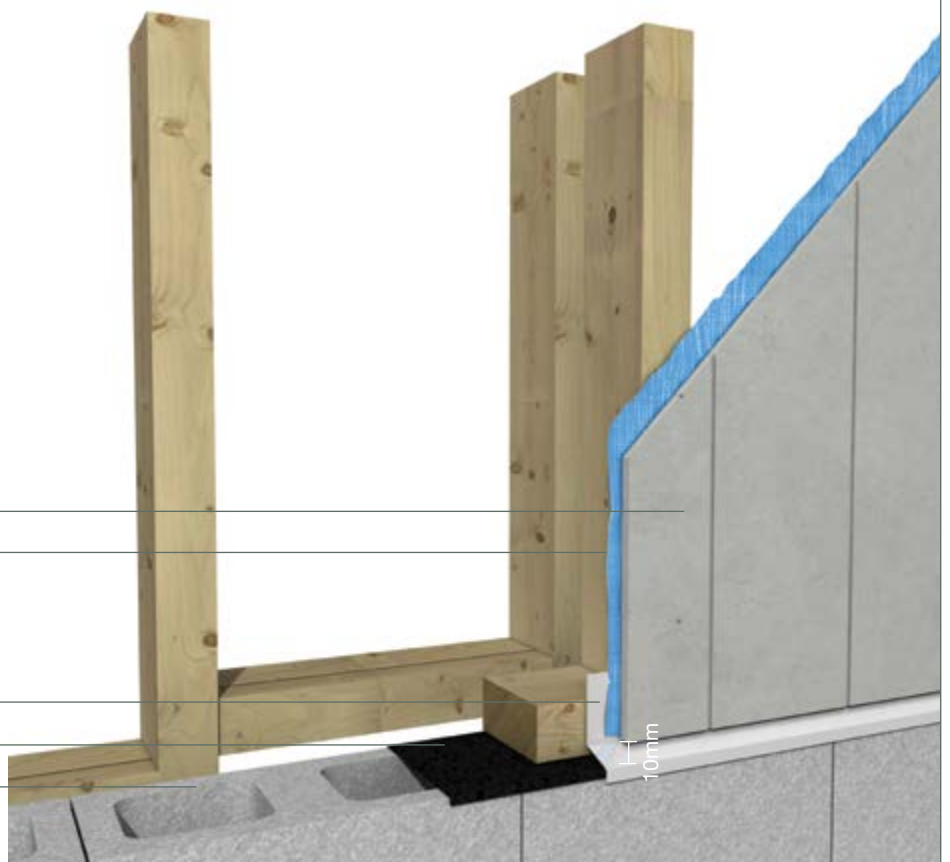

*Components not supplied by BGC

INSTALLATION DETAILS


FIGURE 24
HORIZONTAL JUNCTION 2

Duragroove™

Vapour Permeable Sarking*

Suitable flashing*

Masonry wall*

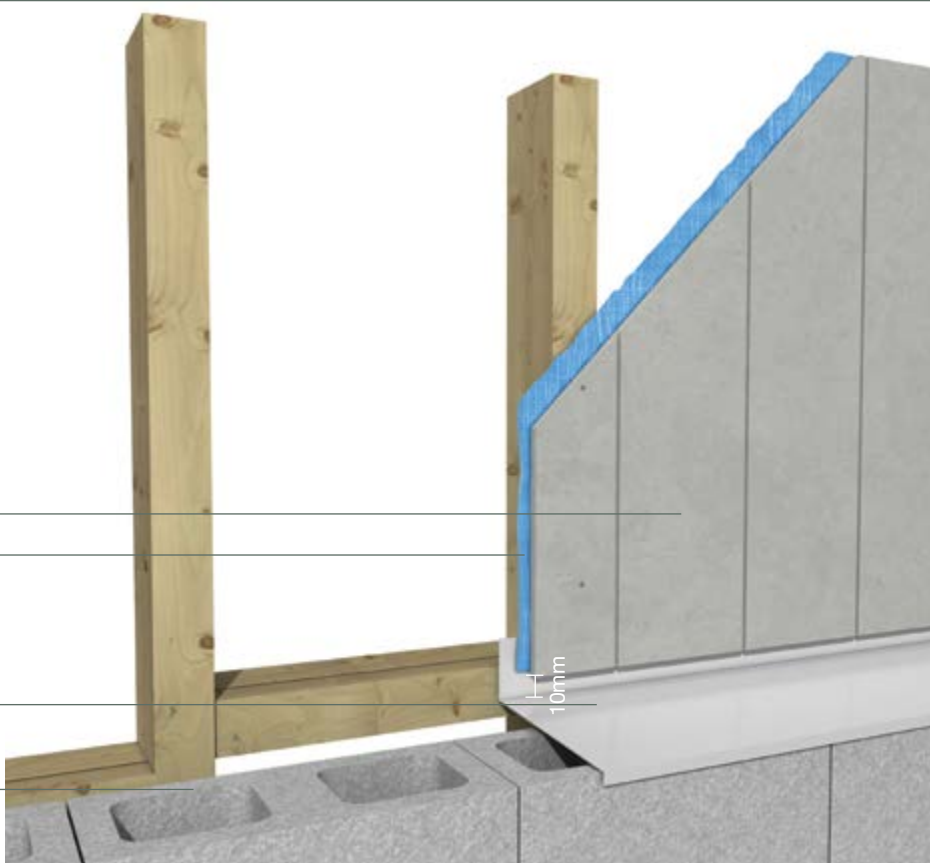

MOISTURE MANAGEMENT

Designers, specifiers and builders have a duty of care to identify moisture-associated risks with any individual building design.

Wall construction design should consider both the interior and exterior environments of the building to effectively manage moisture. Special consideration should be given to buildings that are in extreme climates or at higher risk of wind driven rain.

In addition, all wall openings, penetrations, junctions, connections, window heads, sills and jambs must incorporate appropriate flashing for waterproofing. All other components, materials and installation methods used to manage moisture in walls should comply with the relevant standards of the Building Code of Australia (BCA).

*Components not supplied by BGC

THERMAL BREAKS

Thermal breaks are required for steel framed buildings, in walls enclosing habitable and or usable spaces. Careful consideration of thermal heat transfer and the position of thermal breaks need to be addressed by the architects, engineers and building designers.

Balustrades, parapets, and other non-enclosing wall elements may not require thermal bridging, except where the possibility of high thermal heat transfer exists through the steel CFS sections to the main structural steel element of the building.


As part of the BGC Fibre Cement range EPDM Foam Gasket is able to act as a thermal break and is required to prevent moisture ingress at sheet joints. EPDM Foam Gasket can also be used as a Thermal Break Tape and provides an R value of R 0.2 in accordance with the Building Code of Australia.

Thermal breaks are first installed to all vertical frame members (Studs) then applied horizontally to top and bottom tracks as well as any horizontal noggins.

NOTE: Thermal breaks (BGC EPDM Foam Gasket) is a self adhesive foam gasket/tape. It is installed over the building wrap (sarking).

Leave a small gap between the vertical gasket to allow any moisture to escape.

FIGURE 25
THERMAL BREAKS

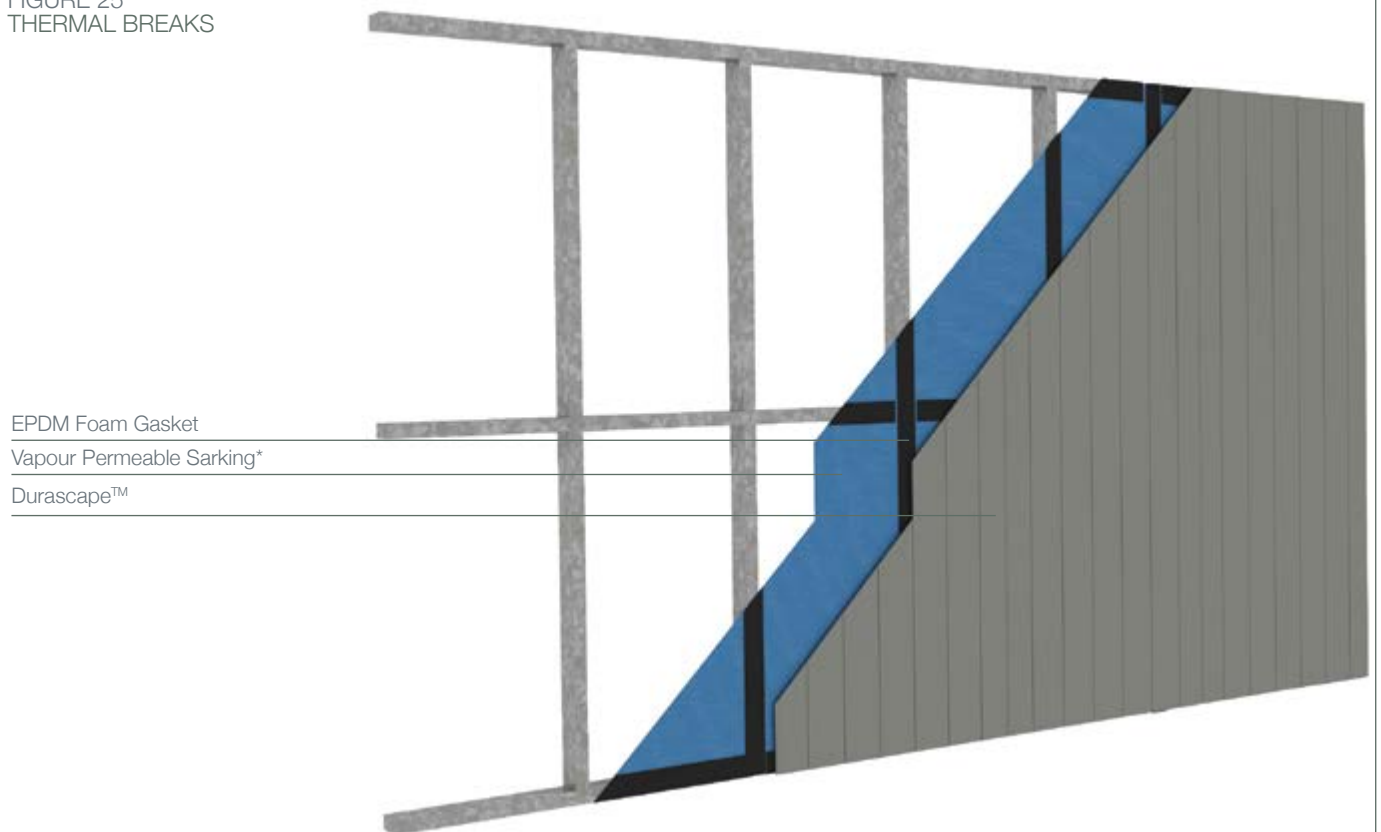

*Components not supplied by BGC

BUSHFIRE AND BOUNDARY WALL AREAS

AS3959:2009 sets out a series of Bushfire threat levels to buildings described as BAL (Bushfire Attack Levels) as follows: BAL-Low, BAL-12.5, BAL-19, BAL-29, BAL-40 or BAL-FZ (Flamezone).

Duragroove™ is eminently suited for both bushfire and boundary wall applications in residential and multi residential buildings.

BUSHFIRE AS3959:2009 APPLICATIONS

Duragroove™ may be used as a stand-alone product to achieve up to BAL 40 when fixed direct to frame as per the fixing instructions in this manual.

Duragroove™ when used in conjunction with BGC 16mm Wet Area Fireboard will comply with the requirements of AS3959:2009 and AS1530.4 to achieve BAL FZ>10.

BOUNDARY/EXTERIOR WALLS

Duragroove™ in conjunction with BGC 16mm Wet Area Fireboard can achieve both 60/60/60 and 90/90/90 FRL fire ratings from the outside as required by the BCA.

Where an exterior wall is required to achieve 60/60/60 FRL (Fire Resistance Level) from the outside, 1 layer of 16mm BGC Wet Area Fireboard installed with Duragroove™ over the Wet Area Fireboard will meet minimum BCA requirements.


Similarly 2 layers of 16mm BGC Wet Area Fireboard used in conjunction with Duragroove™ will achieve 90/90/90 from the outside.

NOTE: All exterior walls must have sarking beneath the Duragroove™. No adhesives are to be used when installing Wet Area Fireboard and the Duragroove™. Nails or screws must be used.

For more information please contact your nearest BGC Fibre Cement office.

FIGURE 26
BOUNDARY WALL SYSTEM

10mm BGC Plasterboard
16mm BGC Wet Area Fireboard
EPDM Foam Gasket
Vapour Permeable Sarking*
Duragroove™

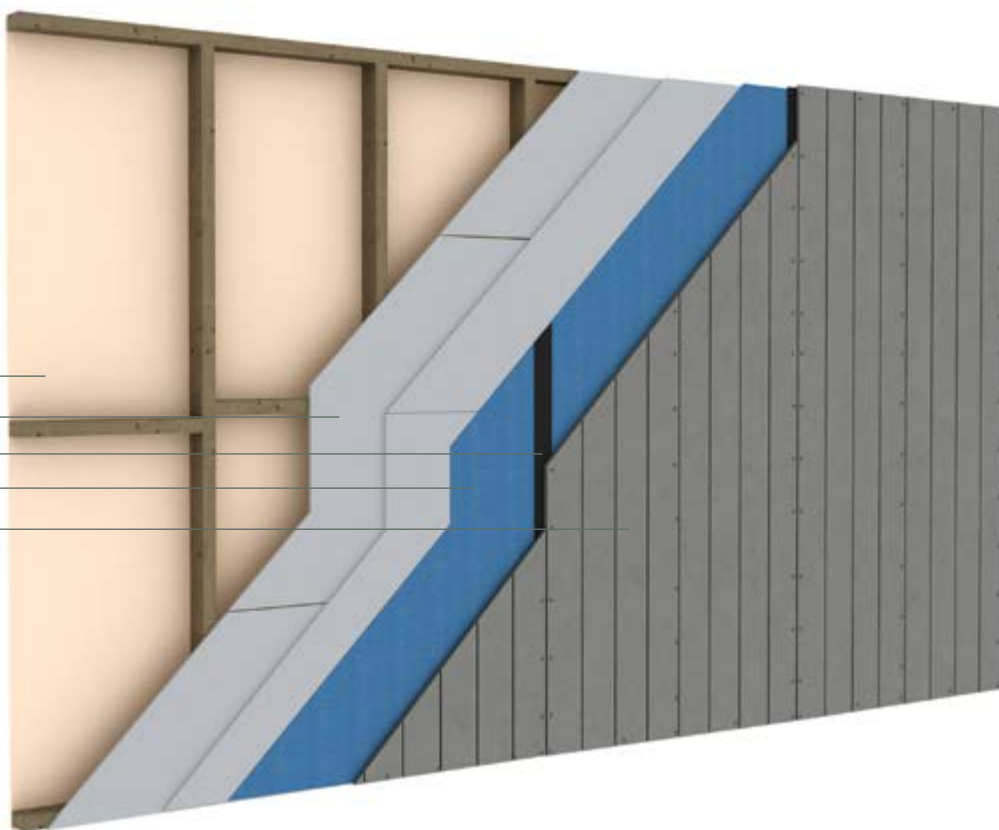

PAINTING

To enhance both the appearance and performance of Duragroove™, BGC recommend that at least two coats of 100% acrylic exterior grade paint be applied. The paint manufacturer's recommendation on application and maintenance of the paint system should be followed.

It is recommended that Duragroove™ is painted according to the paint manufacturer's instructions within three months following delivery to site.

Should Duragroove™ be exposed to the elements for a period beyond the initial three months to achieve an optimum finish an additional priming coat is recommended prior to the top finishing coats being applied.

Ensure that Duragroove™ is dry and clean prior to applying a quality exterior paint system.

Note: BGC recommend the use of a roller or brush application for best results.

MAINTENANCE

Duragroove™ when used in accordance with this literature requires no direct maintenance.

To guard against water penetrating the structure and damaging the framework, annual inspections of the cladding system should be carried out. Check flashing, sealant joints and paint work.

Flashings and sealants must continue to perform their design function.

Damaged sheets should be replaced as originally installed. Paintwork should be maintained in accordance with the manufacturer's instructions.

INSULATION

Duragroove™ sheets will require insulation to be installed in some regions that have thermal loss regulations. Insulation should be installed in accordance with the manufacturer's instructions. Insulation batt's must fit snugly between framing members to minimise heat loss.

DEEMED TO COMPLY

For an up to date and complete list of BGC Products that are 'Deemed to Comply' please refer to www.ntlis.nt.gov.au/deemedtocomply

WARRANTY

We warrant that our products are free from defects caused by faulty manufacture or materials for a period of 15 years from the date of purchase. If you acquire any defective products, we will repair or replace them, supply equivalent replacement products or refund the purchase price within 30 days of receiving a valid claim subject to product inspection and confirmation of the existence of a defect by BGC. We will bear the cost of any such repair, replacement or refund.

This warranty is given by:

BGC Fibre Cement Pty Ltd
121 Bannister Rd Canningvale WA 6155
Phone 08 9334 4900 Fax 08 9334 4749

To claim under this warranty, you must provide proof of purchase as a consumer and make a written claim (including any costs of claiming) to us at the address specified above within 30 days after the defect was reasonably apparent, or if the defect was reasonably apparent prior to installation, the claim must be made prior to installation. You may not claim under this warranty for loss or damage caused by:

- faulty or incorrect installation by non-BGC installers (BGC's installation procedures are at www.bgcinnovadesign.com.au);
- failure to comply with the Building Code of Australia or any applicable legislation, regulations approvals and standards;
- products not made or supplied by BGC;
- abnormal use of the product; or
- normal wear and tear.

The benefits available under this warranty are in addition to other rights and remedies of the consumer under the law. Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage.

You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

CONTACT

TO CONTACT
YOUR NEAREST
BGC STOCKIST,
PLEASE CALL:

ADELAIDE
TELEPHONE
08 8250 4962

BRISBANE
TELEPHONE
07 3271 1711

MELBOURNE
TELEPHONE
03 9392 9444

PERTH
TELEPHONE
08 9334 4900

SYDNEY
TELEPHONE
02 9771 9660

NEW ZEALAND
TELEPHONE
0011 64 9264 1457

TECHNICAL HELP LINE
1300 652 242



Quality
ISO 9001
SAI GLOBAL

**BGC FIBRE CEMENT IS A
PROUD AUSTRALIAN OWNED
MANUFACTURER OF FIBRE
CEMENT PRODUCTS.**

**BGC FIBRE CEMENT PROVIDES
BUILDERS, DEVELOPERS AND
ARCHITECTS WITH A RANGE OF
DESIGN ALTERNATIVES AND
INNOVATIVE PRODUCTS,
SUCH AS:**

EXTERIOR PRODUCTS AND APPLICATIONS INNOVA RANGE OF PRODUCTS

DURACOM™ / A compressed fibre cement facade system.

DURAFLOOR™ / Is the ultimate flooring product that can be used in both interior and exterior applications.

DURAGRID™ RESIDENTIAL & DURAGRID™ LIGHT COMMERCIAL / A light weight facade giving a modern and durable finish.

DURAGROOVE™ / A vertically grooved exterior facade panel.

DURASCAPE™ / A lightweight exterior facade base sheet with a subtle vertical shadow line.

NULINE™ PLUS / A weatherboard style cladding system.

STONESHEET™ / Purpose designed substrate for stone tile facade.

STRATUM™ / Is a trio of plank products, each of which can be used as stand alone products or used together to create a striking exterior cladding solution.

STRATUM™ ERA / A traditional, yet contemporary as it is flat weatherboard.

EXTERIOR PRODUCTS AND APPLICATIONS BGC FIBRE CEMENT RANGE OF PRODUCTS

DURASHEET™ / Ideal for the cladding of gables and lining of eaves. Can also be used on commercial soffits and cladding on non impact areas.

DURAPLANK™ / Available in Smooth, Woodgrain and Rusticated finishes, Duraplank™ is ideal for exterior cladding of upper storey conversions or ground level extensions.

DURATEX™ / A base sheet used for textured coatings on exterior wall applications.

DURALINER™ PLUS / An exterior lining board, this is the perfect substrate for tiles and is ideal for wet areas.

DURALATTICE™ / Square or diamond patterned lattice, suitable for screens, pergolas and fences.

COMPRESSED / Used for domestic, commercial sheet for wet areas, flooring, partitions, exterior decking, fascia and facade cladding.

DURALUX™ PLUS / Suitable for exterior applications where it will be sheltered from direct weather.

INTERIOR PRODUCTS AND APPLICATIONS BGC FIBRE CEMENT RANGE OF PRODUCTS

DURALUX™ PLUS / An interior lining board suitable for ceilings and soffits.

DURALINER™ PLUS / An interior lining board, this is the perfect substrate for tiles and is ideal for wet areas.

CERAMIC TILE UNDERLAY / A substrate for ceramic and slate floor tiles.

VINYL CORK FLOOR COVERINGS /
A substrate for vinyl floors.